

- Order
- Inquiry

SL 45

Position
_____ / _____

Required delivery week: _____

1. Number of units
_____ pieces

2. Stacking
 Inside
 Outside

3. Number of panels (inside view)
 _____ left direction
 _____ right direction

4. Glass
 with: _____
 prepared for: _____ mm

5. Surface
Profile:
 Standard
 RAL 9006
 RAL 9007
 RAL 9016
 in Special colour
RAL _____
 or
Eloxal _____

Hinge:
 Standard
 RAL 9006
 RAL 9007
 RAL 9016
 in Special colour
 RAL _____
 (additional charge)
 Stainless steel hinges
 (additional charge)

Client:

 Tel: _____ Fax: _____
 Contact person _____


Ref:


 Quotation number:

 Delivery address: (if different to client)


6. Hardware choice: ATTENTION! For **parapet installations:**
Solarlux Design handle stainless steel Handle height from frame underside _____ mm

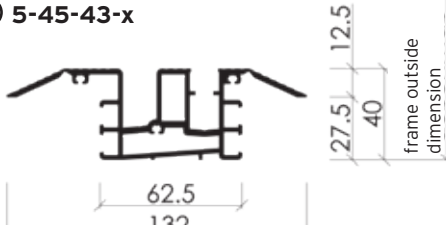
Flat handle on inside without lock (standard)



Flat handle inside / outside with profile cylinder (only possible with paired panel)


Lever handle inside / outside with key cylinder (only possible on first opening swing panels)


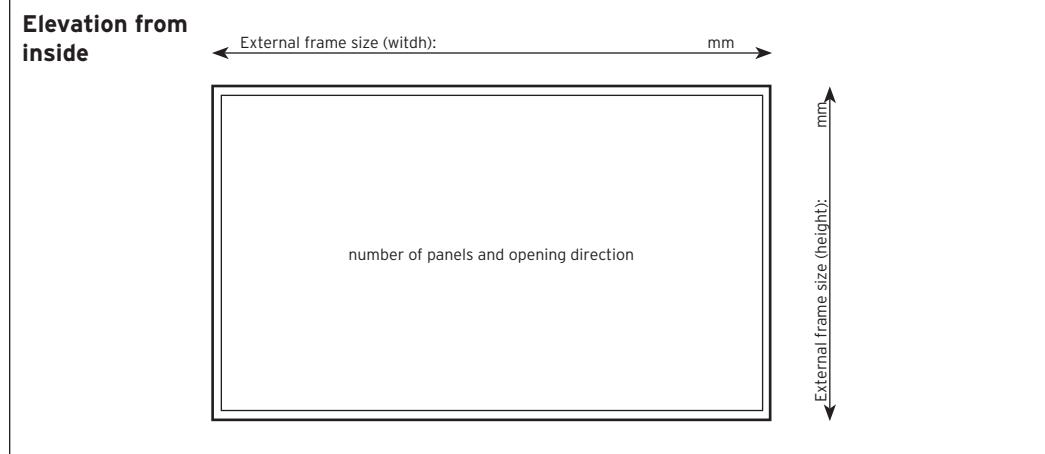
7. Floor track options (Examples are to be found on solarlux.com)

5-45-02-x

 Drainage yes no

5-45-43-x

 No factory installed drainage

5-50-23-x

 No factory installed drainage

8. Drawing



Outside
Plan view _____
 Inside
 panel shown in open position (stacking position)

08/2011- Subject to technical changes without notice