



#### FLOOR TRACKS




#### CONFIGURATION VARIANTS

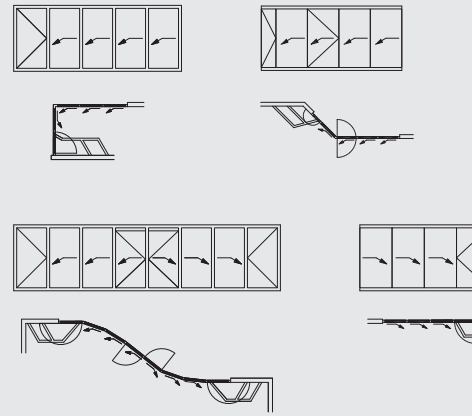

#### PANEL STORAGE POSSIBILITIES

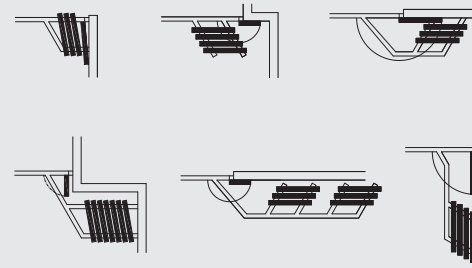

#### VERTICAL SECTION

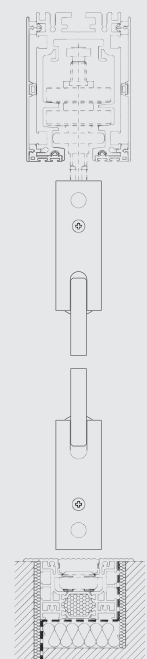

#### VARIANTS

- Top hung Horizontally-Sliding-Wall
- All panels can be slid and locked individually

#### PROFILE SYSTEM

- 35 mm panel thickness
- Uninsulated Horizontally-Sliding-Wall
- Aluminium profile
- Slim frame and panel profiles (panel joint 80 mm)
- Flush floor track without upstand for barrier-free use for domestic and commercial facades
- Individual adjustment of the panels according to local conditions

#### FITTINGS

- Top hung guide track with cover available (optional)
- Faceted façade possible (angles on request)
- Several possibilities for different configurations
- Pull handles made of stainless steel for convenient operation of the entry/exit panels (optional)

#### GLAZING

- Glazing with single pane safety glass
- Glass thickness from 10 to 12 mm

#### SURFACE FINISH

- Powder coating to RAL
- Anodised aluminium to EURAS
- Stainless steel

#### MAXIMUM PANEL SIZES

- 1100 mm x 4000 mm
- Panel weight up to 160 kg
- The total element width is unlimited
- Special sizes on request

#### PANELS TYPES

- Sliding panel
- Opening last panel
- Fixed last panel
- Opening sliding panel
- Fixed sliding panel
- Fixed panel



567021066-900 / 10.2010 / Subject to technical changes




HORizontally-SLIDING-WALL  
SL ALL-GLASS-HSW





#### STABILITY

Espagnolettes with 20 mm throw bolts lock the panels into the bottom track of the frame ensuring they can withstand gales and provide high security.

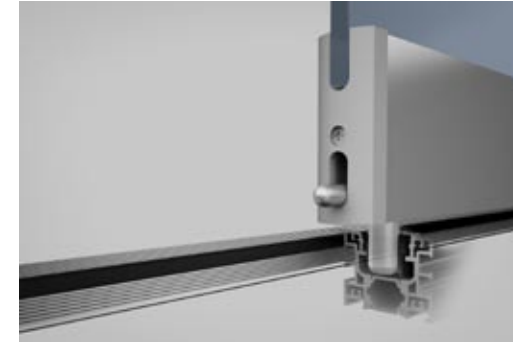

#### ENGINEERED

Ball bearing runners guarantee an extremely easy operation of the panels. Even after installation the folding glass door can be easily height-adjusted which is important if settling of the building occurs.




#### LIGHTNESS

The unique running and guide technology ensures simple movements of the panels into the stacking bays.



#### PROTECTION

The door panel is equipped with rounded aluminium profiles which provides crush protection when opening and closing the panels. (optional)

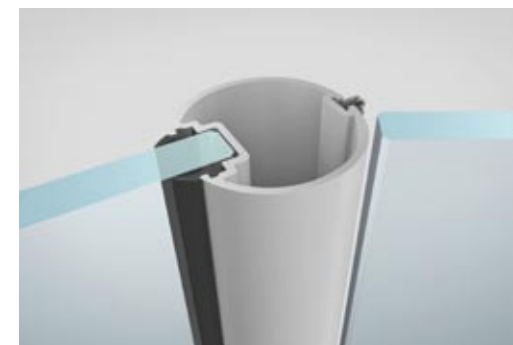

#### OPENING VARIATIONS

A number of opening variations and panel storage options either inside or outside of the room are available to provide the best solution for every installation.



#### TRANSPARENCY

All-glass panels provide a complete transparency for optimising shop concepts and maximising presentation either inside or outside.



#### SECURITY

An entry/exit door panel with an automatic closing mechanism can be integrated at any position in the system. The innovative opening mechanism ensures easy unlocking and movement of the panels.



#### BARRIER FREE

The flush floor track, without upstand ensures a barrierfree entrance and at the same time provides a more inviting entrance to the sales area. Instead of a flush floor track adjustable floor sockets can be incorporated to compensate for uneven floors.

